




## AD 420

### Reliable Drying Performance

- Energy-saving rotary piston compressor
- Large water tank with automatic shut-off when full
- Built-in hygostat
- Operating hours counter
- Air filter
- Quiet operation

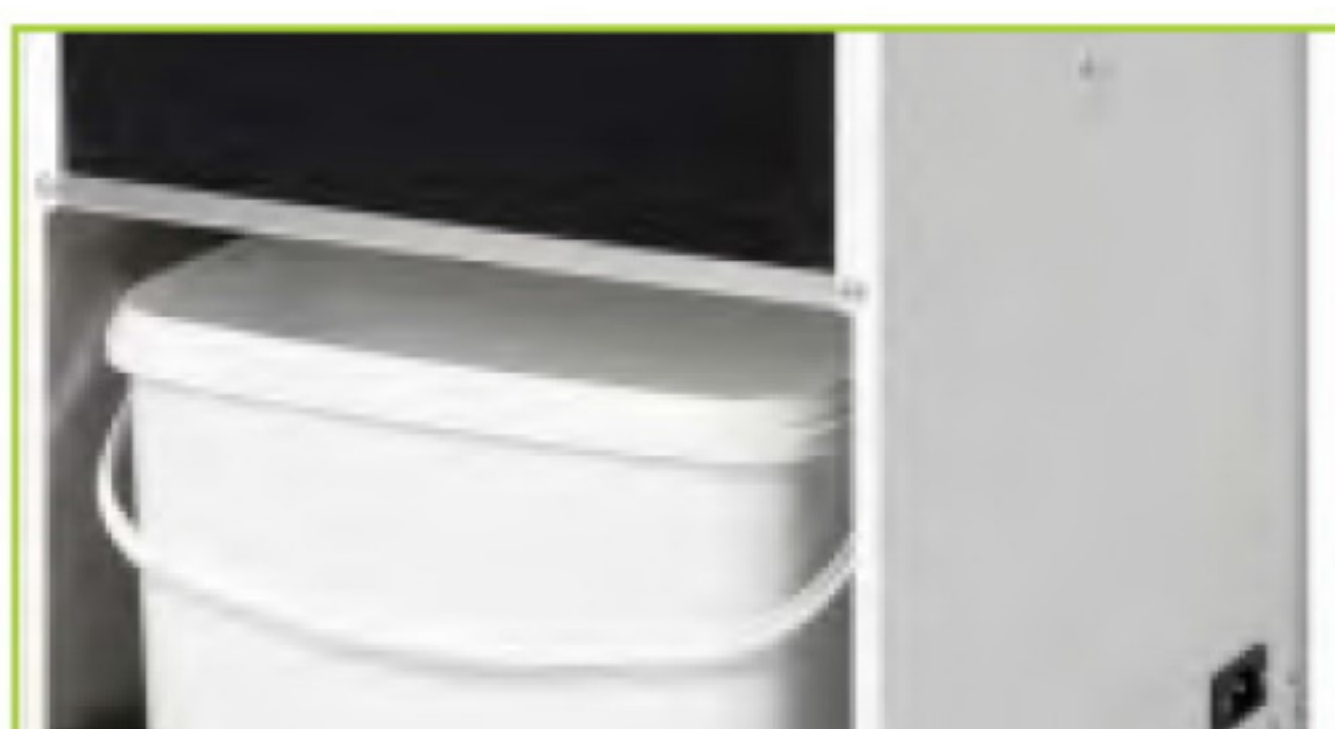

Environmentally friendly,  
high-performance air dehumidifiers –  
equipped with the new technology.

## Type

## AD 420

Type		AD 420
Recommended Coverage (Indicative)*	cu.ft	3000
Extraction (30 °C/80% RH)	1/24 hr	19.0 l / 24 hr
De-humidifying performance/ power consumption at**		
30°C/80% RH	1/24 h	19.0 l / 420 Watt
20°C/60% RH	1/24 h	08.0 l / 340 Watt
10°C/70% RH	1/24 h	06.0 l / 280 Watt
Max. power consumption	Watt	420
Air circulation rate	m <sup>3</sup> /h	Speed 1 = 300 cbm/h
	m <sup>3</sup> /h	Speed 2 = 390 cbm/h
Working temperature range	°C	5°C to 32°C
Noise Level	dB	46
Power supply	V/Hz	230V/50Hz
Dimension (height/width/depth)	Inches	21" x 13" x 14"
Weight	Kg	14
Arrangement		On the Ground
Coolant		R134a
Condensate drainage		Water Tank (8.3l) or Hose connector
Maintenance required		Empty bucket, clean/change air filter
Timer (Optional)		Yes

\*Guideline figures/based on experience • \*\*Based on DIN EN 810  
• Subject to technical changes • Made in Germany