

# ultrasonic humidifier

origin

O<sup>3</sup> | O<sup>6</sup>



3 / 6 Litres Per Hour  
humidification capacity



10% - 99%  
humidity range



Recommended Up to 5000 / 10000 cu.ft.  
indicative coverage area



World-class Sensor  
for accurate sensing



Operation Panel LCD  
display with 1% precision humidity control




Stainless Steel Tank  
for rust free maintenance



O<sup>3</sup> | O<sup>6</sup>

Specifications

Humidifying Capacity	l/hr	3   6
Power consumption, Power supply (Single Phase, 230 V / 50 Hz)		300 watts   600 watts
Operating range temperature		3°C – 40°C
Operating range humidity		10%-99%
Recommended coverage (Indicative)	cu.ft.	Upto 5000   Upto 10000
Dimensions (W x D x H)	inches	21" x 18" x 19.5"   24" x 13" x 19.5"
Weight	kgs	26   31
Water Supply Recommended		De-mineralized / Reverse Osmosis preferable

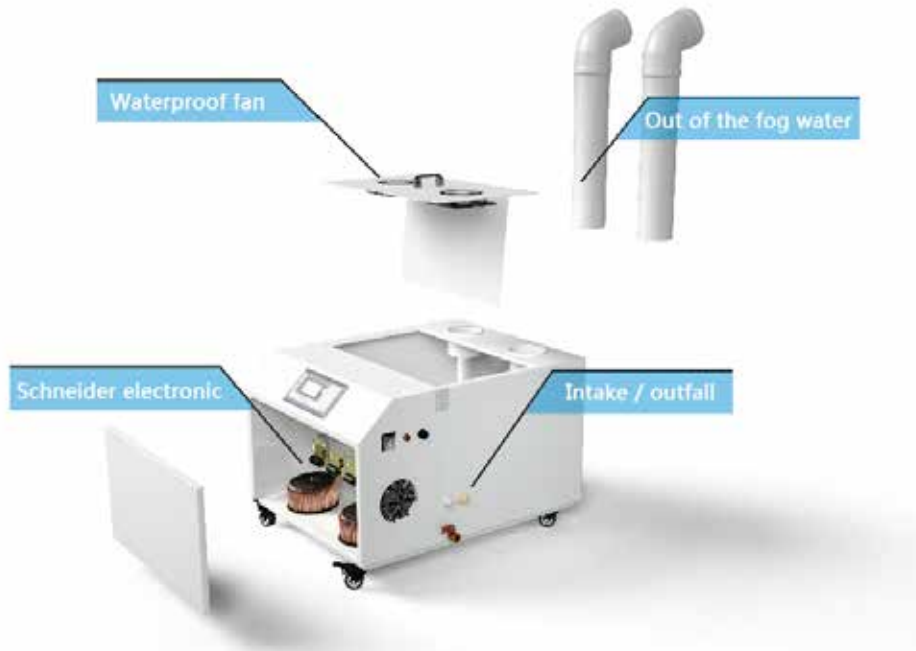

Industries



Cold Storages



Mushroom Cultivation



Ripening Chambers



R & D Labs



Textile



Printing



Paper & Pulp



Tobacco



Tea



Cashew